

PGC

Offers 3 precision levels to suit various application needs.

- Available in 7 different frame sizes.
- Ideal for most industrial and general servo motor motion control applications.
- Features a **round mounting flange** and a caged precision class spur planetary gear system.
- Delivers high torque capacity and quiet operation.
- Available in in-line housing configurations for sizes up to 235 mm.
- Precision positioning with backlash as low as < 3 arc-min.
- Supports ratios from 3:1 up to 100:1.




Frame Size (mm)	50, 70, 90, 120, 155, 205, 235
Ratio	3 : 1 - 100 : 1
Nominal Input Speed (rpm)	2,000 - 3,000
Max Input Speed (rpm)	4,000 - 6,000
Backlash (arc-min)	1 Stage : 3 - 12 2 Stages : 5 - 15
Noise Level (dBA / 1m)	60 - 75

Features

- ▶ In-line configuration with output shaft 13 mm through 75 mm diameter.
- ▶ Torque capacity range: 10 Nm through 1670 Nm.
- ▶ Caged planet carrier: with precision planet gear set.
- ▶ High performance, efficiencies and low acoustics.
- ▶ Wide range of ratios: 5 single stage ratios and up to 9 two-stage ratios.
- ▶ Output bearings deliver radial load capacity as high as 13500 N, and axial capacities up to 7300N.
- ▶ Square servo and step motor input: accommodates 50 mm through 235 mm, with optional sizes available.
- ▶ Service life lubricant.

PGC Single Stage Dimensions

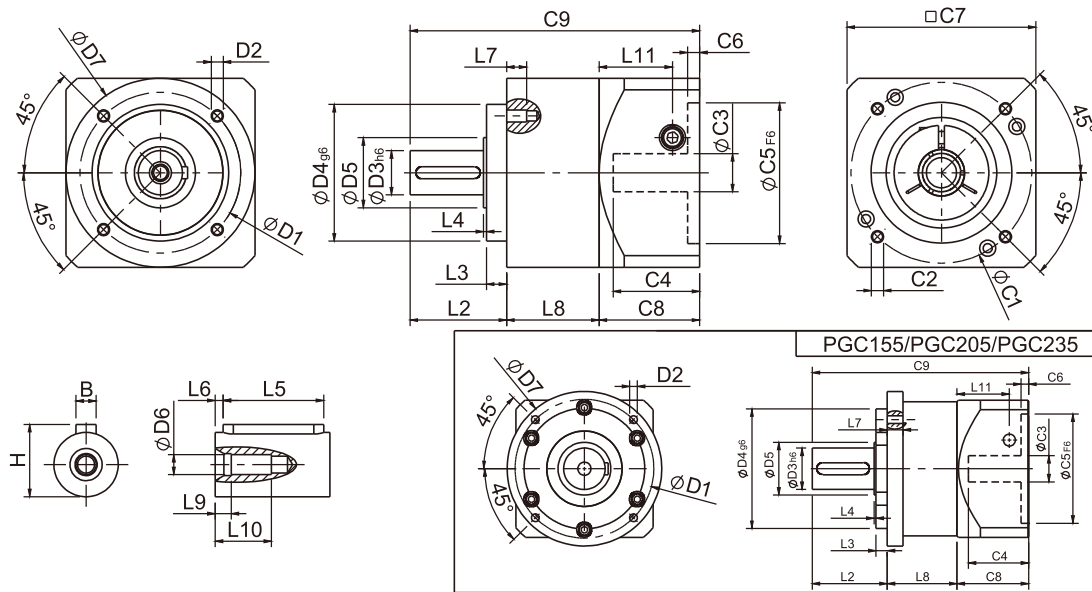

Specifications


Unit:mm

Dimensions	PGC50	PGC70	PGC90	PGC120	PGC155	PGC205	PGC235
D1	44	62	80	108	140	184	210
D2	M4x0.7P	M5x0.8P	M6x1.0P	M8x1.25P	M10x1.5P	M12x1.75P	M16x2.0P
D3 _{h6}	12	16	22	32	40	55	75
D4 _{g6}	35	52	68	90	120	160	180
D5	15	25	35	45	50	70	90
D6	M4x0.7P	M5x0.8P	M8x1.25P	M12x1.75P	M16x2.0P	M20x2.5P	M20x2.5P
D7	50	70	94	120	155	205	235
L2	24.5	35	48	60	93	99.5	126
L3	4	5	10	6	8	15	18
L4	1.5	1.5	1.5	3	6	2.5	3
L5	15	25	32	40	60	70	90
L6	2	2	3	5	5	6	7
L7	8	10	10	15	18	21	32
L8	30	38	46	61	79	92.5	129.5
L9	4	4	4.5	6	6	8	7
L10	14	16.5	20.5	30	38	48	42
L11	24.4	31.5	36.5	42	63	69.5	102.2
C1 ²	46	70	90	115	145	200	235
C2 ²	M4x0.7P	M5x0.8P	M6x1.0P	M8x1.25P	M8x1.25P	M12x1.75P	M12x1.75P
C3 ²	≤8	≤14	≤19/≤24	≤24/≤28	≤35	≤50	≤55
C4 ²	27	35	43	58	66	82	98
C5 ² _{F6}	30	50	70	95	110	114.3	200
C6 ²	4	5	5	8	6	13	12
C7 ²	50	70	94	120	140	182	220
C8 ²	38.5	46	55	63	80	95	130
C9 ²	93	119	149	184	252	287	385.5
B	5	5	6	10	12	16	20
H	15	18	24.5	35	43	59	79.5

* C1~C9 are motor specific dimensions (metric std shown). Size may vary according to motor flange.

* Specification subject to change without notice.

PGC Double Stage Dimensions-1

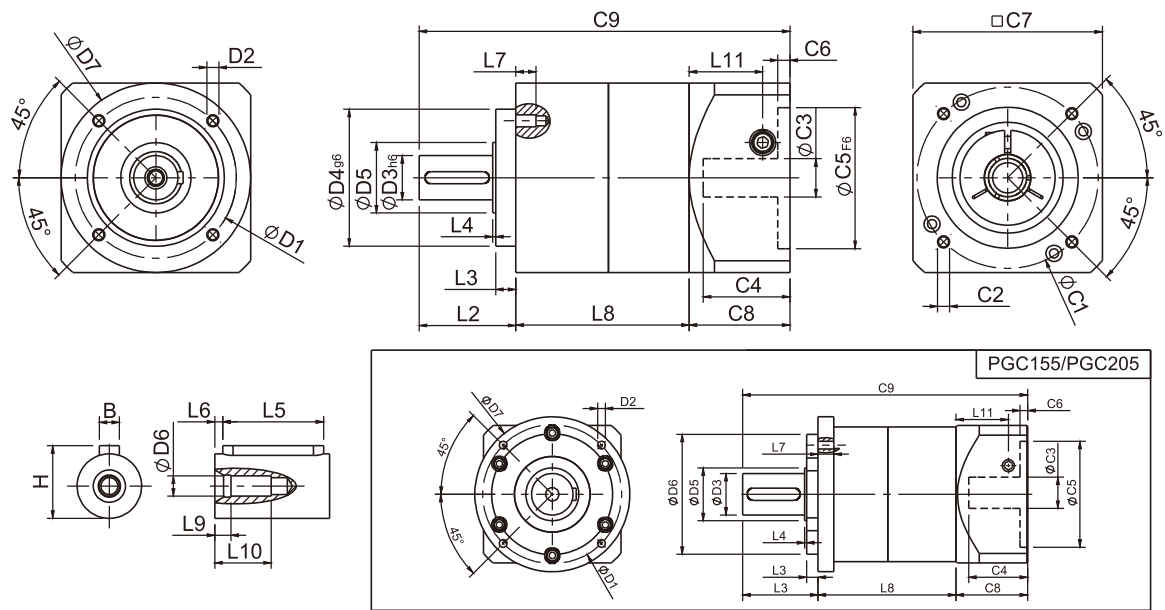

Specifications


Unit:mm

Dimensions	PGC50	PGC70	PGC90	PGC120	PGC155	PGC205
D1	44	62	80	108	140	184
D2	M4x0.7P	M5x0.8P	M6x1.0P	M8x1.25P	M10x1.5P	M12x1.75P
D3 _{h6}	12	16	22	32	40	55
D4 _{g6}	35	52	68	90	120	160
D5	15	25	35	45	50	70
D6	M4x0.7P	M5x0.8P	M8x1.25P	M12x1.75P	M16x2.0P	M20x2.5P
D7	50	70	94	120	155	205
L2	24.5	35	48	60	93	99.5
L3	4	5	10	6	8	15
L4	1.5	1.5	1.5	3	6	2.5
L5	15	25	32	40	60	70
L6	2	2	3	5	5	6
L7	8	10	10	15	18	21
L8	56	66	86	109	140	182.5
L9	4	4	4.5	6	6	8
L10	14	16.5	20.5	30	38	48
L11	24.4	31.5	36.5	42	63	69.5
C1 ²	46	70	90	115	145	200
C2 ²	M4x0.7P	M5x0.8P	M6x1.0P	M8x1.25P	M8x1.25P	M12x1.75P
C3 ²	≤8	≤14	≤19/≤24	≤24/≤28	≤35	≤50
C4 ²	27	35	43	58	66	82
C5 ² _{F6}	30	50	70	95	110	114.3
C6 ²	4	5	5	8	6	13
C7 ²	50	70	94	120	140	182
C8 ²	34	44	50	63	80	95
C9 ²	114.5	145	184	232	313	377
B	5	5	6	10	12	16
H	15	18	24.5	35	43	59

★ C1~C9 are motor specific dimensions (metric std shown). Size may vary according to motor flange.

★ Specification subject to change without notice.

PGC Double Stage Dimensions-2

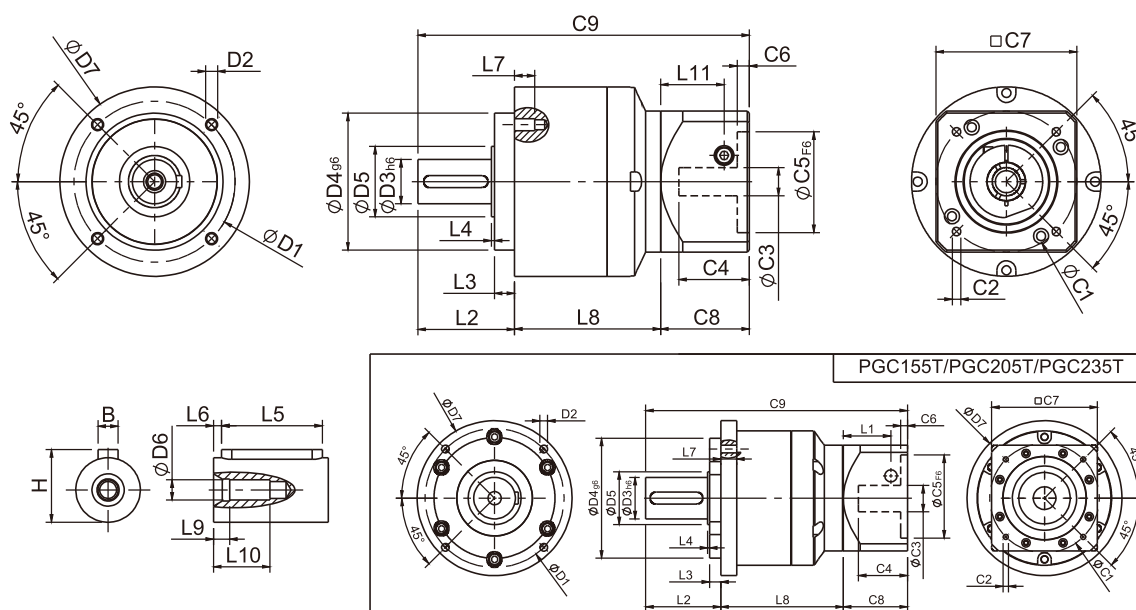

Specifications

Unit:mm

Dimensions	PGC70T	PGC90T	PGC120T	PGC155T	PGC205T	PGC235T
D1	62	80	108	140	184	210
D2	M5x0.8P	M6x1.0P	M8x1.25P	M10x1.5P	M12x1.75P	M16x2.0P
D3 _{h6}	16	22	32	40	55	75
D4 _{g6}	52	68	90	120	160	180
D5	25	35	45	50	70	90
D6	M5x0.8P	M8x1.25P	M12x1.75P	M16x2.0P	M20x2.5P	M20x2.5P
D7	70	94	120	155	205	235
L2	35	48	60	93	99.5	126
L3	5	10	6	8	15	18
L4	1.5	1.5	3	6	2.5	3
L5	25	32	40	60	70	90
L6	2	3	5	5	6	7
L7	10	10	15	18	21	32
L8	60.8	72.5	99.4	127	162	211.5
L9	4	4.5	6	6	8	7
L10	16.5	20.5	30	38	48	42
L11	29	35.5	40.5	42	63	69.5
C1 ²	46	70	90	115	145	200
C2 ²	M4x0.7P	M5x0.8P	M6x1.0P	M8x1.25P	M8x1.25P	M12x1.75P
C3 ²	≤8	≤14	≤19/≤24	≤24/≤28	≤35	≤50
C4 ²	28.5	41	47.75	58	66	82
C5 ² _{F6}	30	50	70	95	110	114.3
C6 ²	5.5	8	6	8	6	13
C7 ²	50	70	94	120	140	182
C8 ²	40	50	55	63	80	95
C9 ²	135.8	170.5	214.4	283	341.5	432.5
B	5	6	10	12	16	20
H	18	24.5	35	43	59	79.5

★ C1~C9 are motor specific dimensions (metric std shown). Size may vary according to motor flange.

★ Specification subject to change without notice.

PGC Specifications

Specifications		Stage	Ratio	PGC-50	PGC-70	PGC-90	PGC-120	PGC-155	PGC-205	PGC-235		
Nominal Output Torque T _{2N}	N · m	1	3	13.8	44.2	95.2	283	482	1151	1670		
			4	11.9	35.9	74.6	249	490	1055	1574		
			5	13.8	43.0	95.2	283	473	1151	1670		
			7	11.9	36.0	85.6	219	400	1055	1574		
			10	10.1	25.0	75.0	210	320	763	1184		
		Stage	Ratio	PGC-50	PGC-70(T)	PGC-90(T)	PGC-120(T)	PGC-155(T)	PGC-205(T)	PGC-235T		
		2	15	13.8	44.2	95.2	283	482	1151	1670		
			20	11.9	35.9	74.6	249	490	1055	1574		
			25	13.8	43.0	95.2	283	473	1151	1670		
			30	13.8	43.0	95.2	283	473	1151	1670		
			35	13.8	43.0	95.2	283	473	1151	1670		
			40	13.8	43.0	95.2	283	473	1151	1670		
			50	13.8	43.0	95.2	283	473	1151	1670		
			70	11.9	36.0	85.6	219	400	1055	1574		
		100	10.1	25.0	75.0	210	320	763	1184			
Emergency Stop Torque T _{2NOT}	N · m		(3.0 times of Nominal Output Torque) (*Max. Output Torque T _{2B} =60% of Emergency Stop Torque)									
Nominal Input Speed n _{1N}	rpm	1,2	3-100	3000	3000	3000	2500	2000	2000	2000		
Max. Input Speed n _{1max}	rpm	1,2	3-100	6000	6000	6000	5000	4000	4000	4000		
Micro Backlash P0	arcmin	1 2	3-10 12-100	- -	- -	- -	≤3 ≤5	≤3 ≤5	≤3 ≤5	≤3 ≤5		
Precision Backlash P1	arcmin	1 2	3-10 12-100	- -	≤6 ≤9	≤6 ≤9	≤5 ≤7	≤5 ≤7	≤5 ≤7	≤5 ≤7		
Standard Backlash P2	arcmin	1 2	3-10 12-100	≤12 ≤15	≤9 ≤12	≤9 ≤12	≤7 ≤9	≤7 ≤9	≤7 ≤9	≤7 ≤9		
Torsional Rigidity	N · m /arcmin	1,2	3-100	1.0	2.8	7.5	15.5	30	57	110		
Max. Radial Load F _{2rB} ¹	N	1,2	3-100	450	1200	2050	4250	7680	9080	13500		
Max. Axial Load F _{2aB} ¹	N	1,2	3-100	320	900	1420	2930	4680	5100	7300		
Operating Temp.	°C		3-100	-10°C ~ +90°C								
Service Life	hr		3-100	20,000 (10,000 Continuous operation)								
Efficiency	%	1 2	3-10 12-100	≥96% ≥92%								
Weight	kg	1 2	3-10 12-100	0.7 0.9	14 2.2(1.7)	3.0 5.0(3.4)	7.3 11.5(8.5)	15.6 20.7(17.2)	26 36(31)	56 62		
Mounting Position	-	1,2	3-100	Any Direction								
Noise Level ²	dBA/1m	1,2	3-100	60	62	65	65	70	70	75		
Protection Class	-	1,2	3-100	IP65								
Lubrication	-	1,2	3-100	Synthetic Lubricant								
Inertia (J1)												
Stage	Ratio	unit		PGC-50	PGC-70	PGC-90	PGC-120	PGC-155	PGC-205	PGC-235		
1	3	Kg · cm ²		0.03	0.20	0.81	2.20	7.89	25.2	77.9		
	4			0.02	0.16	0.65	1.80	5.83	19.8	56.5		
	5			0.02	0.15	0.62	1.61	5.38	18.3	53.3		
	7			0.02	0.14	0.60	1.55	5.22	17.8	53.0		
	10			0.02	0.14	0.60	1.53	5.20	17.6	52.9		
Stage	Ratio			PGC-50	PGC-70(T)	PGC-90(T)	PGC-120(T)	PGC-155(T)	PGC-205(T)	PGC-235T		
2	15/20/25			0.02	0.15(0.02)	0.62(0.15)	1.61(0.62)	5.38(1.61)	18.3(5.38)	18.3		
	30/35/40			0.02	0.14(0.02)	0.60(0.14)	1.55(0.60)	5.22(1.55)	17.8(5.22)	17.8		
	50/70/100			0.02	0.14(0.02)	0.60(0.14)	1.53(0.60)	5.20(1.53)	17.6(5.20)	17.6		
* 1. Applied to the output shaft center at 100 rpm.												
* 2. Environment noise level 30 dB; distance 1m; measured under free loading with input speed 3000 rpm; ratio = 10 (1-stage) or ratio = 100 (2-stage).												
※The above figures/specifications are subject to change without prior notice.												

Products due to human error, natural disasters or other factors lead to poor or damaged, will not be covered under warranty.